

## MAGNETIC LEVEL INDICATORS MLI

### DESCRIPTION

The ADCA MLI magnetic level indicator is a robust solution for continuous measurement, display, and monitoring of liquid levels in industrial tanks and vessels. Operating on the principle of communicating tubes, the ADCA MLI features a bypass chamber mounted to the side of the vessel, ensuring that the liquid level inside the chamber mirrors that of the main tank.

A float containing high-strength permanent magnets travels within the bypass tube, magnetically actuating an external visual indicator without direct contact. This non-invasive design ensures reliable performance even in demanding environments.

Easily integrates with optional accessories such as reed switches and reed chains for enhanced control and automation.

### MAIN FEATURES

Stainless steel construction.

Measuring range up to 4 meters.

Measuring accuracy  $\pm 5$  mm.

Minimal leak points as compared to sight glasses.

No process media in contact with the indicator glass.

Continuous measurement of levels, independent of physical and chemical changes of the media: flashing, foaming, bubble formation, etc.

**OPTIONS:** Magnetic bistable reed switches for point-level detection.  
Reed chain transmitters.  
Floats designed for varying liquid densities, including low specific gravity applications.  
Special designs on request.

### AVAILABLE

**MODELS:** MLI16.

**CONNECTIONS:** Flanged EN 1092-1 PN 40.  
Flanged ASME B16.5 Class 150 or 300.  
Male threaded ISO 7 R.  
Male threaded NPT ASME B1.20.1.  
Others on request.

**INSTALLATION:** Always with the bottom cover pointing downwards.



CE MARKING – GROUP 2 (PED – EUROPEAN DIRECTIVE)	
PN 40	CATEGORY
DN 25	1 (CE marked)


BODY LIMITING CONDITIONS		
FLANGED / PN 40 CLASS 300 *	FLANGED CLASS 150 **	RELATED TEMPERATURE
ALLOWABLE PRESSURE	ALLOWABLE PRESSURE	
40 bar	15,3 bar	50 °C
37,9 bar	13,3 bar	100 °C
34,4 bar	–	150 °C
31,8 bar	11,1 bar	200 °C

PMO – Maximum operating pressure: 30 bar.

TMO – Maximum operating temperature: 200 °C.

\* According to EN 1092-1:2018;

\*\* According to EN 1759-1:2004.

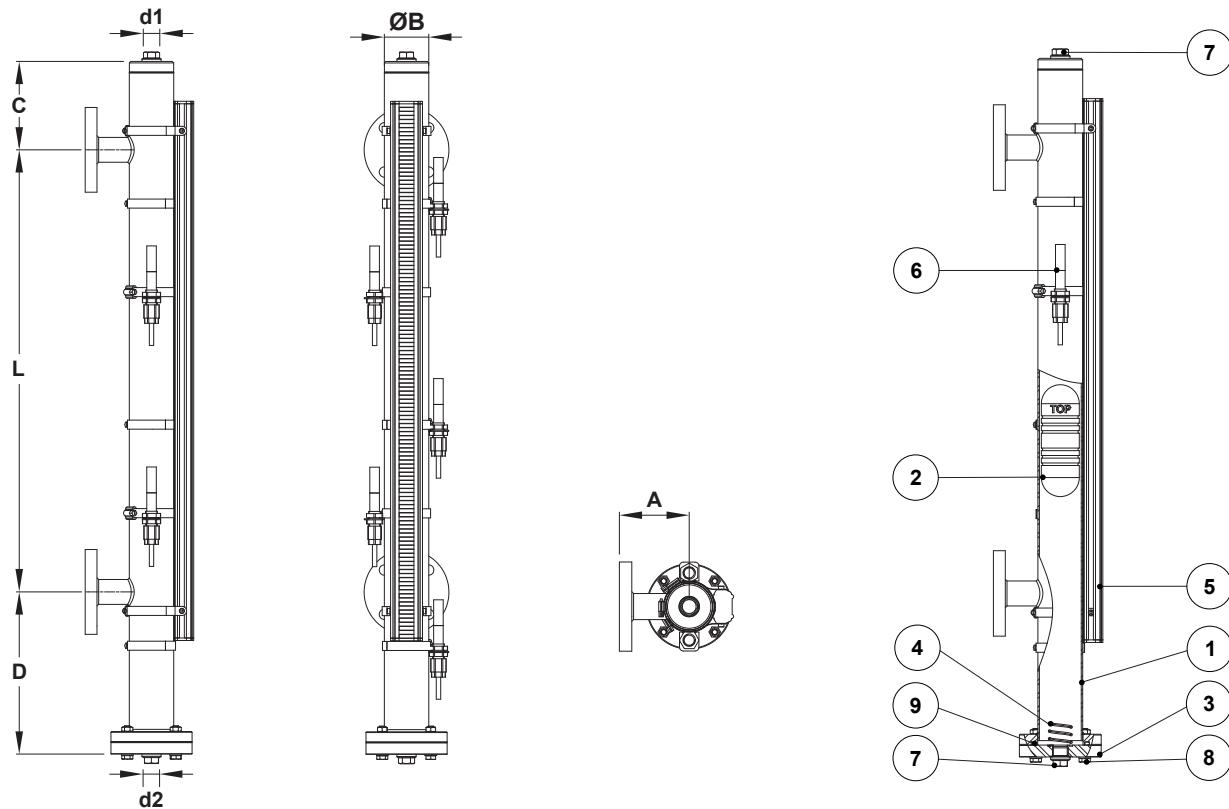

**DIMENSIONS (mm)**

SIZE	A	ØB	C	D	d1	d2	L	WEIGHT (kg)
1/2" – DN 15	90	60	120	220 **	1/2"	1/2"	*	***
3/4" – DN 20	90	60	120	220 **	1/2"	1/2"	*	***
1" – DN 25	90	60	120	220 **	1/2"	1/2"	*	***

\* Center-to-center dimension to be provided by the customer.

\*\* May vary depending on the density of the fluid.

\*\*\* Weight to be determined according to final dimensions. Consult the manufacturer.

Remarks: As standard, in versions manufactured with EN 1092-1 flanges or ISO 7 Rp threads, connections d1 and d2 are female threaded ISO 7 Rp. In versions with ASME B16.5 flanges or NPT threads, these connections are female threaded NPT.

**MATERIALS**


POS. No.	DESIGNATION	MATERIAL
1	Body	AISI 316L / 1.4404
2	* Float (a)	** AISI 316 / 1.4401
3	Bottom cover	AISI 316L / 1.4404
4	Float spring	AISI 302 / 1.4300
5	Indication rail	Aluminium with AISI 316 flaps
6	Magnet switch	Plastic
7	Plug	AISI 316L / 1.4404
8	Bolt	Stainless steel A2-70
9	* O-ring	** FPM; EPDM

\* Available spare parts; \*\* Others on request.

(a) For fluid densities between 920 and 1075 kg/m<sup>3</sup>. Others on request.

## MAGNETIC SWITCHES

Magnetic level indicators can be fitted with magnetic reed switches for discrete level control and alarm signaling. These switches are actuated by the float's magnetic field and can be positioned at specific setpoints along the gauge. Ideal for high/low level alarms or pump control, reed switches offer a simple, reliable, and maintenance-free solution for point-level detection in demanding process environments.

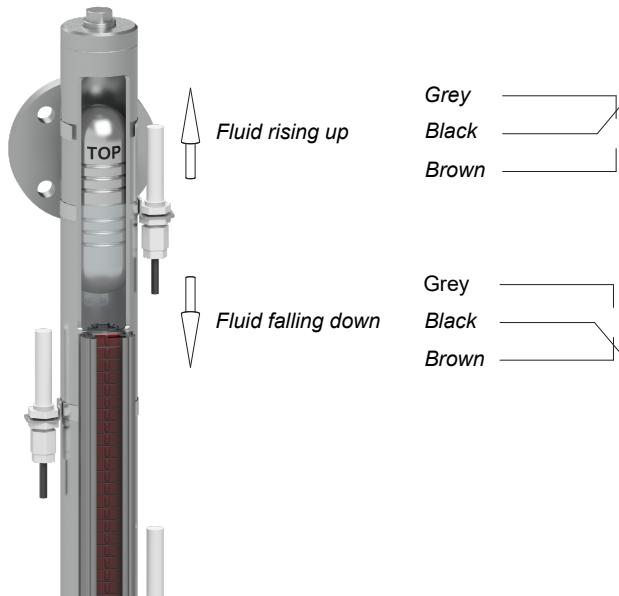

TECHNICAL DATA	
IP rating	IP 67
Contacts	Fe/Ni with rhodium as contact
Cable length	2 meters
Material	ABS
Ambient air temperature	-25 to 70 °C
Maximum switching frequency	100 Hz
Maximum switching performance	60 VA/W
Maximum switching current	1,0 A
Maximum switching voltage	250 V AC/DC
Switch-on time	4,5 ms
Drop-out time	7,0 ms
Options	IP68 Stainless steel enclosure Ex ia / Ex d Other cable lengths

## REED CHAIN TRANSMITTERS

Reed chain transmitters enable continuous level measurement via a standard 4 to 20 mA analog output. The reed chain is mounted along the side of the level gauge (full length as standard), ensuring precise and reliable signal transmission across the entire measurement range. This option provides seamless integration with control systems and enhances process monitoring capabilities.



TECHNICAL DATA	
IP rating	IP 67
Supply voltage	8 to 35 V DC
Output	4 to 20 mA (2 wire)
Temperature	-50 to 350 °C
Accuracy	± 7,5 mm
Material	ABS (enclosure) AISI 316L /1.4404 (rod)
Electrical connections	M20 x 1,5 cable gland
Options	IP68 Higher accuracy (± 5 mm) HART communication Stainless steel enclosure Enclosure with LCD display Ex ia / Ex d

ORDERING CODES MLI									
GROUP DESIGNATION	MLI	16	LL	1000	X	X	N	25	
MLI – Magnetic level indicator	MLI								
<b>SERIES</b>									
MLI16		16							
<b>PIPE CONNECTION ORIENTATION</b>									
Side / Side			LL						
Side / Bottom			LB						
Top / Side			TL						
Top / Bottom			TB						
<b>CENTER-TO-CENTER</b>									
...									
600 mm			0600						
...									
1200 mm			1200						
...									
4000 mm			4000						
<b>HOUSING / INDICATION RAIL</b>									
Housing in AISI 316L / 1.4404; Indicator rail in aluminium with stainless steel flaps (white/red)					X				
<b>SEAL MATERIAL</b>									
FPM / Viton – Tmax 200 °C						X			
EPDM – Tmax 150 °C (180 °C with steam and hot water)						E			
<b>PIPE CONNECTIONS</b>									
Flanged EN 1092-1 PN 40							N		
Flanged ASME B16.5 Class 150							U		
Flanged ASME B16.5 Class 300							V		
Male threaded ISO 7 R							A		
Male threaded NPT ASME B1.20.1							C		
<b>SIZE</b>									
1/2" or DN 15							15		
3/4" or DN 20							20		
1" or DN 25							25		
<b>SPECIAL CONSTRUCTION / ADDITIONAL OPTIONS</b>									
A full description must be provided and validated in case of a non-standard construction									E

Remark: Accessories must be requested separately, e.g.: MLI16LL0600XXN25 fitted with 5 pc. MSB2 magnetic reed switches.